

TapeUltra-LED

NEW

LOW VOLTAGE



Product Description

ULTRA-HIGH OUTPUT, ULTRA-HIGH EFFICACY, ULTRA-LOW PRICE

TapeUltra-LED has a higher output and higher efficacy than other LED tapes, without giving up the advantage of low cost.

Product Features

- Available color temperatures:
 - 3000 K
 - 4000 K
 - 6500 K
 - Additional color temperatures (special order)
- Available densities:
 - 320 – 1.45 W/ft, 127 lm/W
 - 640 – 3.22 W/ft, 118 lm/W
 - 1280 – 6.52 W/ft, 117 lm/W
- Optional: Special order pre-cut lengths with soldered power cord
- Can be ordered pre-assembled with extrusion and frosted lens
- Self-adhering, flexible LED strip
- Stocked in 196" (5m) rolls
- Finish: white tape with exposed LEDs
- To be used with 24 Vdc Constant Voltage Driver
- 50,000 hours usable life
- Excellent CRI >90

Product Details






Available Options

Necessary Accessories on Page 42

MODEL	LENGTH	POWER	LIGHT OUTPUT	EFFICACY	CRI	MAX CONNECTED	PART NO. (3000 K)	PART NO. (6500 K)
TapeUltra-LED 320	196"rolls	1.45 W/ft	184 lm/ft	127 lm/W	>90	32.8' or 48 W	TAPE/U3/196/3000	TAPE/U3/196/6500
TapeUltra-LED 640	196"rolls	3.22 W/ft	379 lm/ft	118 lm/W	>90	14.9' or 48 W	TAPE/U6/196/3000	TAPE/U6/196/6500
TapeUltra-LED 1280	196"rolls	6.52 W/ft	762 lm/ft	117 lm/W	>90	7.3' or 48 W	TAPE/U12/196/3000	TAPE/U12/196/6500

Compatible Drivers on Page 38

Dimensions

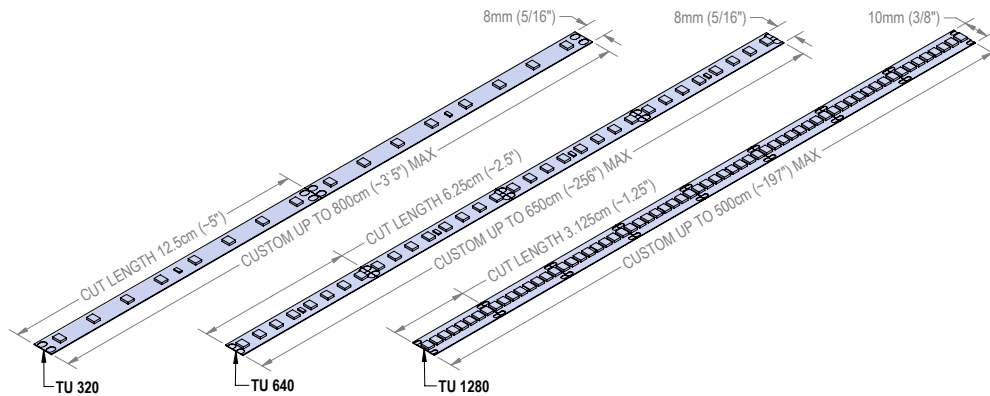

Low Voltage Drivers

Constant Voltage Drivers

24 Vdc Drivers



Daisy Driver, 30W
(Full Specs on Page #94)



Daisy Driver, 75W
(Full Specs on Page #95)



Daisy Driver, 96W
(Full Specs on Page #96)



Driver, 6W
(Full Specs on Page #98)



Driver, 30W
(Full Specs on Page #99)



Driver, 75W
(Full Specs on Page #100)



Driver, 96W
(Full Specs on Page #101)

Compatibility

Constant Voltage Compatible LEDs

LINEAR

ThinStick-LED

CStick-LED

TapeEven-LED

Curve-LED

TapeUltra-LED

TapeBasic-LED

Stick3-LED

Stick2-LED

StickVE-LED

Low Voltage Accessories

TapeUltra-LED

Power Cords

FINISH	LENGTH	PART NO.
White	3"	TAPE/B/PC3/ST
White	12"	TAPE/B/PC12/ST
White	36"	TAPE/B/PC36/ST
White	79"	TAPE/B/PC79/ST
White	144"	TAPE/B/PC144/ST
Black	3"	TAPE/B/PC3/ST/BL
Black	12"	TAPE/B/PC12/ST/BL
Black	36"	TAPE/B/PC36/ST/BL
Black	79"	TAPE/B/PC79/ST/BL
Black	144"	TAPE/B/PC144/ST/BL

Connecting Cables

FINISH	LENGTH	PART NO.
White	2", Quick connect	TAPE/B/CC2/N8
White	6", Quick connect	TAPE/B/CC6/N8
White	12", Quick connect	TAPE/B/CC12/N8
White	3", soldered*	TAPE/B/CC03/ST
White	6", soldered	TAPE/B/CC06/ST
White	12", soldered	TAPE/B/CC12/ST

Optional Accessories

ACCESSORIES	PART NO.
Dimming Controller	DIMCONTROL/S
Y-Cable Adapter	STICKDIM/YCABLE
Remote Control Dimmer	RCPSDIM/V2
Rocker Switch	PS24V/SWITCH
Rocker Switch, DC plug	PS24V/SWITCH/DC
Terminal Block	PS24V/TB
Terminal Block, DC plug	PS24V/TB/DC/S
Terminal Block, DC, Black	PS24V/TB/DC/BL/S
24 V Occupancy Switch	PS24V/SW/OC
Sensor Switch	IRSWITCH/H
Sensor Switch, Dimmable	IRSWITCH/H/D
Power Cord locking clip	CLIP/24V/CCPC
Cover Profile, frosted, 39"	STICK2/CP/39

TapeBasic-LED

Power Cords

FINISH	LENGTH	PART NO.
White	3"	TAPE/B/PC3/ST
White	12"	TAPE/B/PC12/ST
White	36"	TAPE/B/PC36/ST
White	79"	TAPE/B/PC79/ST
White	144"	TAPE/B/PC144/ST
Black	3"	TAPE/B/PC3/ST/BL
Black	12"	TAPE/B/PC12/ST/BL
Black	36"	TAPE/B/PC36/ST/BL
Black	79"	TAPE/B/PC79/ST/BL
Black	144"	TAPE/B/PC144/ST/BL

Connecting Cables

FINISH	LENGTH	PART NO.
White	2", Quick connect	TAPE/B/CC2/N8
White	6", Quick connect	TAPE/B/CC6/N8
White	12", Quick connect	TAPE/B/CC12/N8
White	3", soldered*	TAPE/B/CC03/ST
White	6", soldered	TAPE/B/CC06/ST
White	12", soldered	TAPE/B/CC12/ST

Optional Accessories

ACCESSORIES	PART NO.
Dimming Module	STICKPSDIM/S
Dimming Controller	DIMCONTROL/S
Y-Cable Adapter	STICKDIM/YCABLE
Remote Control Dimmer	RCPSDIM/V2
Rocker Switch	PS24V/SWITCH
Rocker Switch, DC plug	PS24V/SWITCH/DC
Terminal Block	PS24V/TB
Terminal Block, DC plug	PS24V/TB/DC/S
Terminal Block, DC, Black	PS24V/TB/DC/BL/S
24 V Occupancy Switch	PS24V/SW/OC
Sensor Switch	IRSWITCH/H
Sensor Switch, Dimmable	IRSWITCH/H/D
Cover Profile, frosted, 39"	STICK2/CP/39